


Overseeder 3D 1575

The redesigned Overseeder 3D 1575 features an all-new seed delivery mechanism with single-point adjustment. The tough discs cut grooves in the soil for seed to be accurately placed before the roller closes the groove to cover the seed. This durable seeder is well suited to a range of surface types.

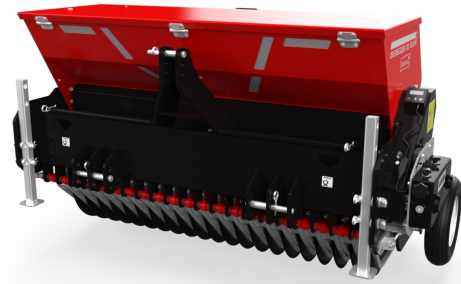

Specifications

SKU	122.157.502
Working width (m)	1.58
Working width (inch)	62.2
Max. Working depth (mm)	20
Max. Working speed (km h)	12
Max. Working speed (mph)	7.5
Weight (kg)	1184
Weight (lbs)	2610
Sowing distance (mm)	75
Sowing distance (inch)	2.9
Hopper capacity (L)	276
Hopper capacity (cu.ft.)	9.7
Number of seeding elements	21
Min. Tractor HP required	40
Min. Lifting capacity 610 mm behind the lifting eyes (kg)	1300
Min. Lifting capacity 24 inch behind the lifting eyes (lbs)	2866
Max. capacity (m ² hr)	18.900
Max. capacity (ft ² hr)	203.438
Three-point hitch	3-point CAT 1-2
Lubricant	EP2

Distributed by:



www.centaur-asiapacific.com
info@centaur-asiapacific.com

*Hong Kong, Macau, Malaysia (Johor).