




## S4-M4-C4 Vacuum sweepers

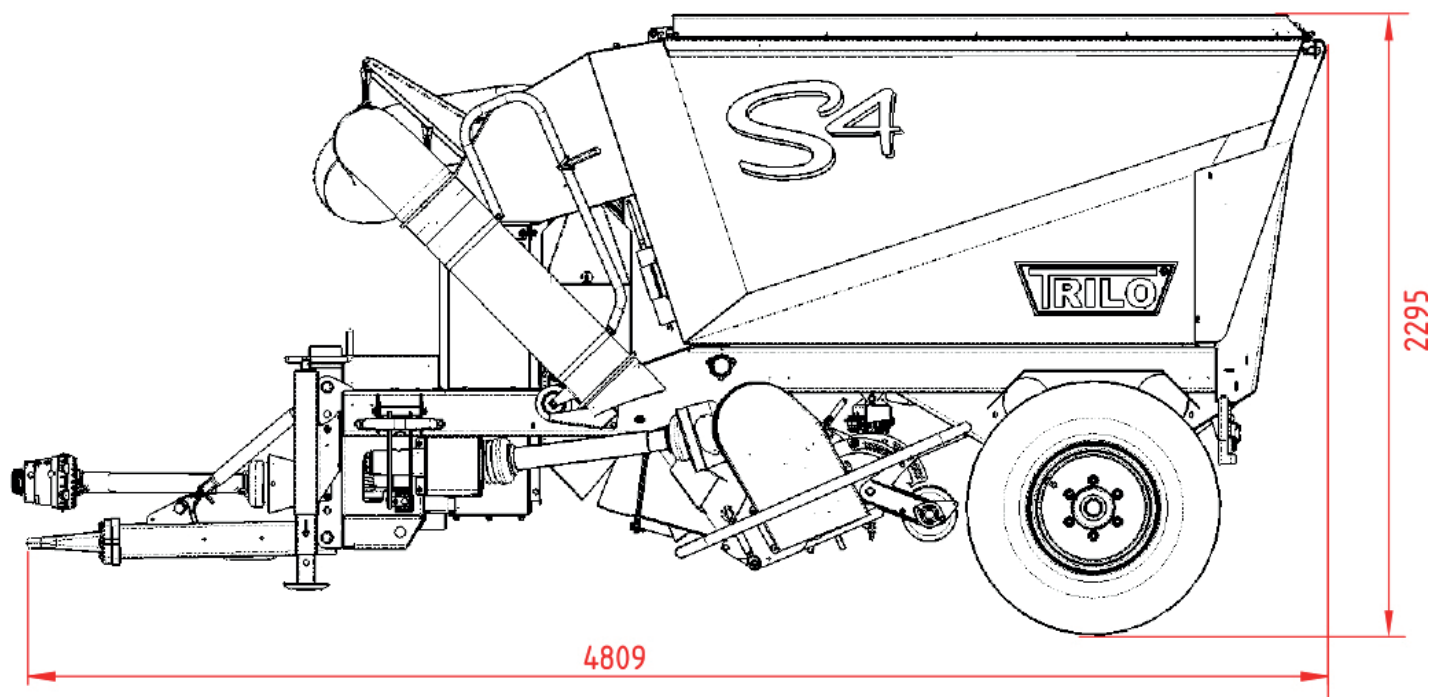



### Technical specifications

|                                            |                                                  |
|--------------------------------------------|--------------------------------------------------|
| Fan diameter:                              | Ø 850 mm                                         |
| Number of fan blades:                      | 4                                                |
| PTO output ( <i>cut &amp; collect</i> ):   | 70 - 90 hp (51 - 66 kW)                          |
| PTO output ( <i>sweep &amp; collect</i> ): | 45 - 70 hp (33 - 51 kW)                          |
| PTO output ( <i>with a wanderhose</i> ):   | 35 - 50 hp (26 - 36 kW)                          |
| PTO:                                       | 540 / 1000 RPM                                   |
| Drive:                                     | Power take-off                                   |
| Required hydraulics:                       | 180 bar - 40 l/min.                              |
| Required hydraulic connections:            | 1 x double acting                                |
| Air capacity:                              | 315 m <sup>3</sup> /min.                         |
| Noise level:                               | 84 dB(A)                                         |
| Loading capacity:                          | 4 m <sup>3</sup>                                 |
| Wander hose:                               | Ø 250 mm, length 5 + 1 meter ( <i>Optional</i> ) |
| Working width sweeping:                    | 1,8 / 2,1 / 2,4 m                                |
| Working width cut & collect:               | 1,8 / 2,1                                        |
| Tyres:                                     | 500/50R17                                        |

Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.



## S4-M4-C4 Vacuum sweepers

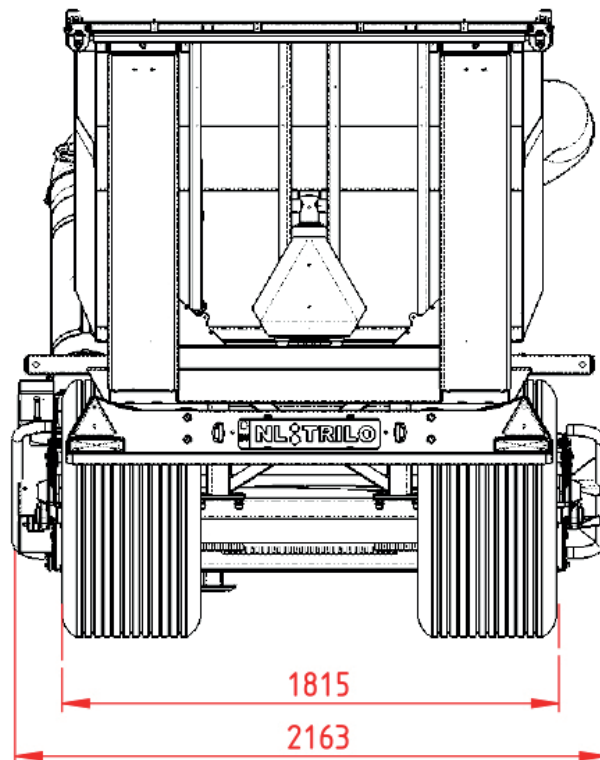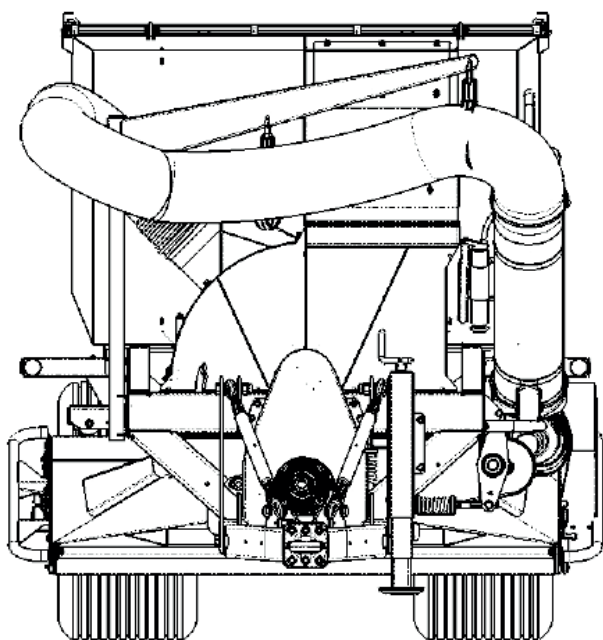

Hong Kong | Singapore | Malaysia | Australia






Email: [info@centaur-asiapacific.com](mailto:info@centaur-asiapacific.com)

Website: [www.centaur-asiapacific.com](http://www.centaur-asiapacific.com)

Centaur Asia Pacific is the distributor for TRILO in Hong Kong, Macau, Singapore and Malaysia.

*Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.*

# Suction hood width

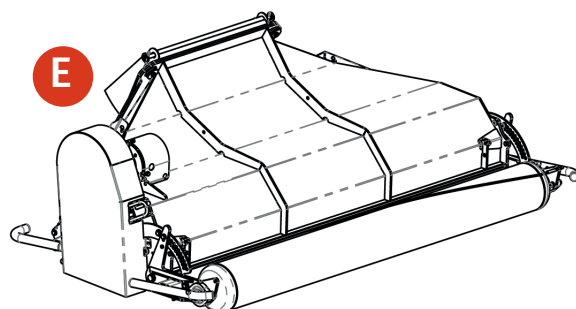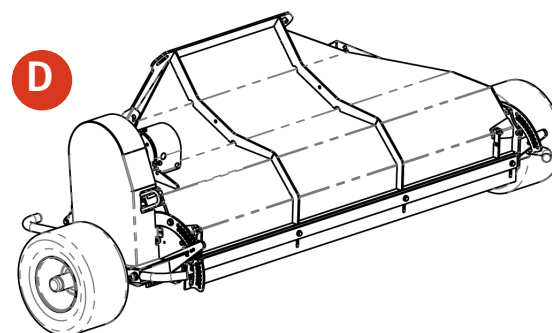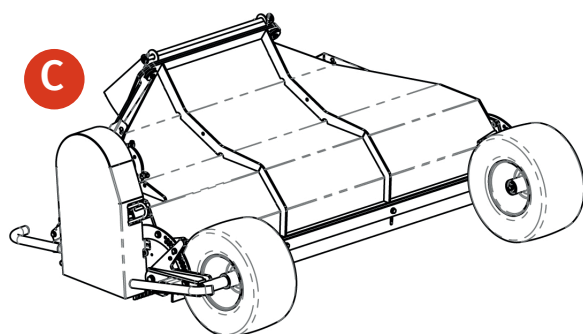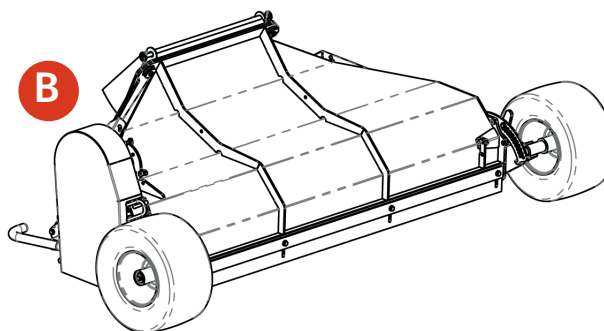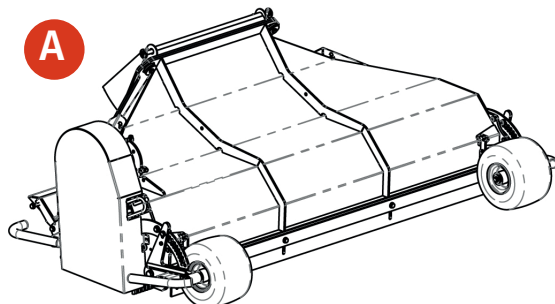

| Type     | Roller/Tyre         | Tyre Type               | Height range | Working width - Overall width |        |        |        | Field of application                   |
|----------|---------------------|-------------------------|--------------|-------------------------------|--------|--------|--------|----------------------------------------|
|          |                     |                         |              | 1.80 m                        | 2.10 m | 2.40 m | 3.00 m |                                        |
| <b>A</b> | 11 x 7.00 (Default) | Air or Foam Filled Tyre | -5..13 cm    | 2.12 m                        | 2.42 m | 2.72 m | x      | General, Road use, Offroad, Compact    |
| <b>B</b> | 18 x 9.50 (Slick)   | Air or Foam Filled Tyre | -5..15 cm    | 2.46 m                        | 2.76 m | 3.06 m | x      | Turf Production<br>Wide Area Collector |
| <b>C</b> | 16 x 9.50 (Slick)   | Air or Foam Filled Tyre | -5..15 cm    | x                             | x      | 2.72 m | x      | Turf Production<br>Wide Area Collector |
| <b>D</b> | 16 x 9.50           | Air or Foam Filled Tyre | -5..10 cm    | 2.70 m                        | 3.00 m | 3.30 m | x      | Golf course                            |
| <b>E</b> | Roller (Default)    | Steel                   | -5..15 cm    | 2.12 m                        | 2.42 m | 2.72 m | x      | Mowing                                 |